

VHF Packet Radio  
With a Focus On EMCOMM

by

Jon Perelstein, WB2RYV


In an EMCOMM situation, it is expected that the bulk of information sent by ham radio is data and not voice

- Data examples
  - Shelter population lists
  - Logistics lists
  - Volumes of health and welfare messages
  - Stuff that can be stored on computers, sorted, processed, printed, etc.
- Why not voice?
  - We are not “first responders”, we are not field search and rescue
  - We can expect to be at shelters and other fixed sites communicating volumes of information
  - Voice is a much less efficient means of communicating volumes of information
  - Data can be stored on computer, can be further processed, can be sorted and summarized, etc.

**Contrast with Public Service scenarios that are mostly short-message, real-time voice**


## VHF Packet uses FM radio and a computer to send data reliably

- For ham radio, generally 1200 or 9600 baud
- Packet on VHF is usually FM

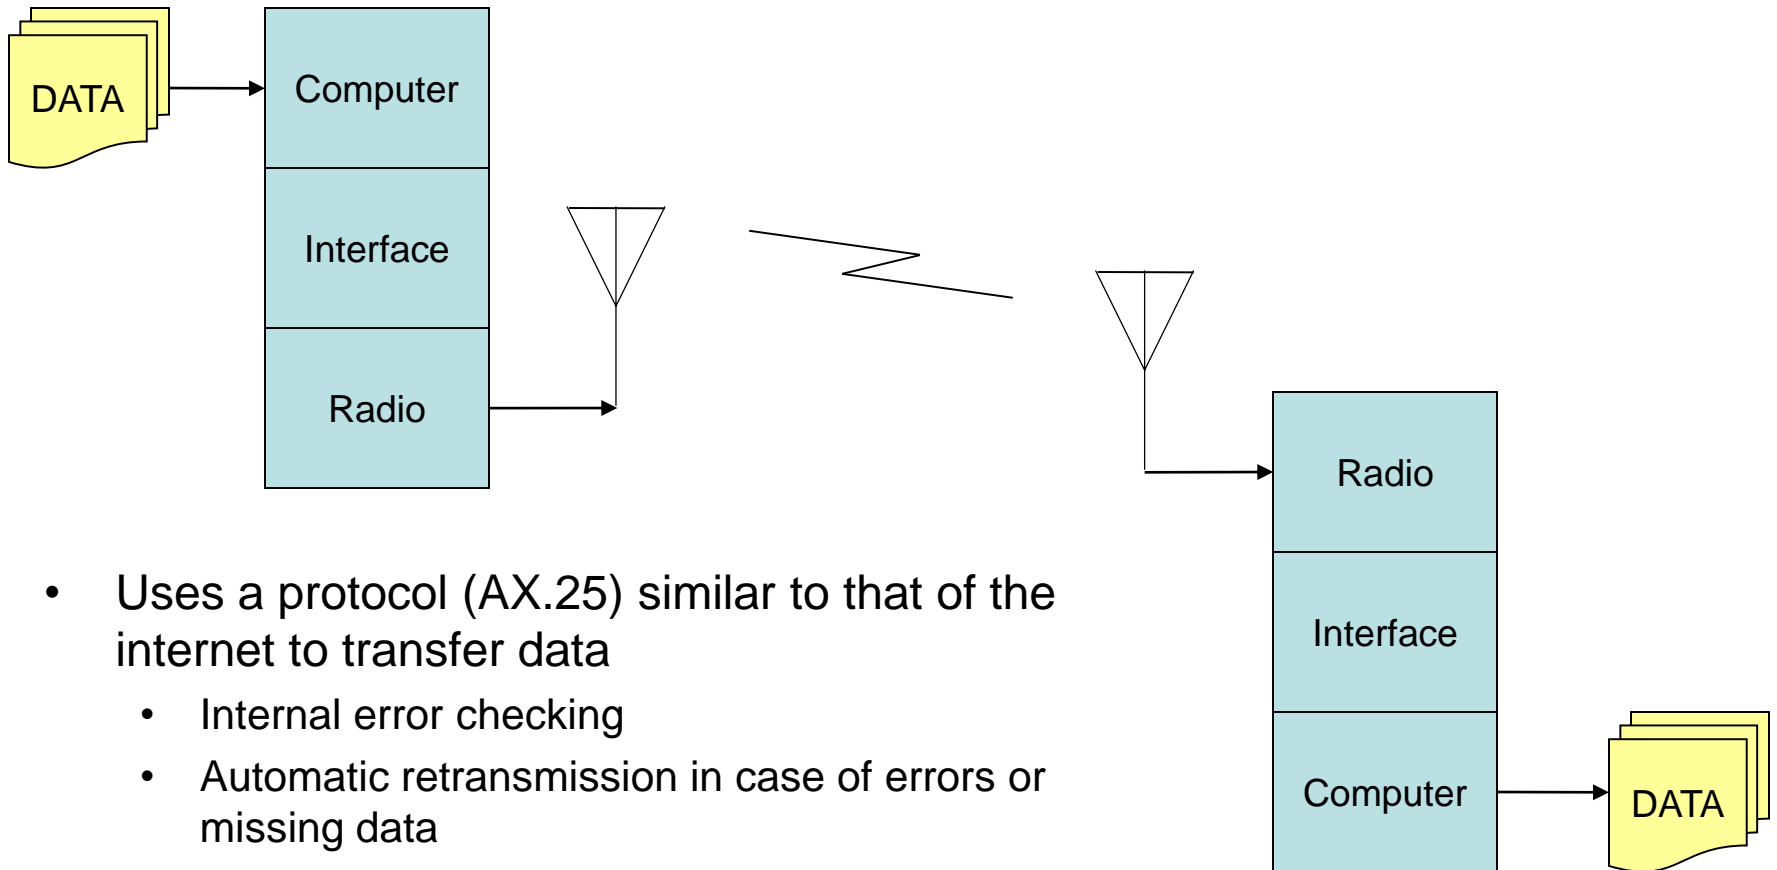

- Uses a protocol (AX.25) similar to that of the internet to transfer data
  - Internal error checking
  - Automatic retransmission in case of errors or missing data

## Data sent via Packet Radio can be stored on computer

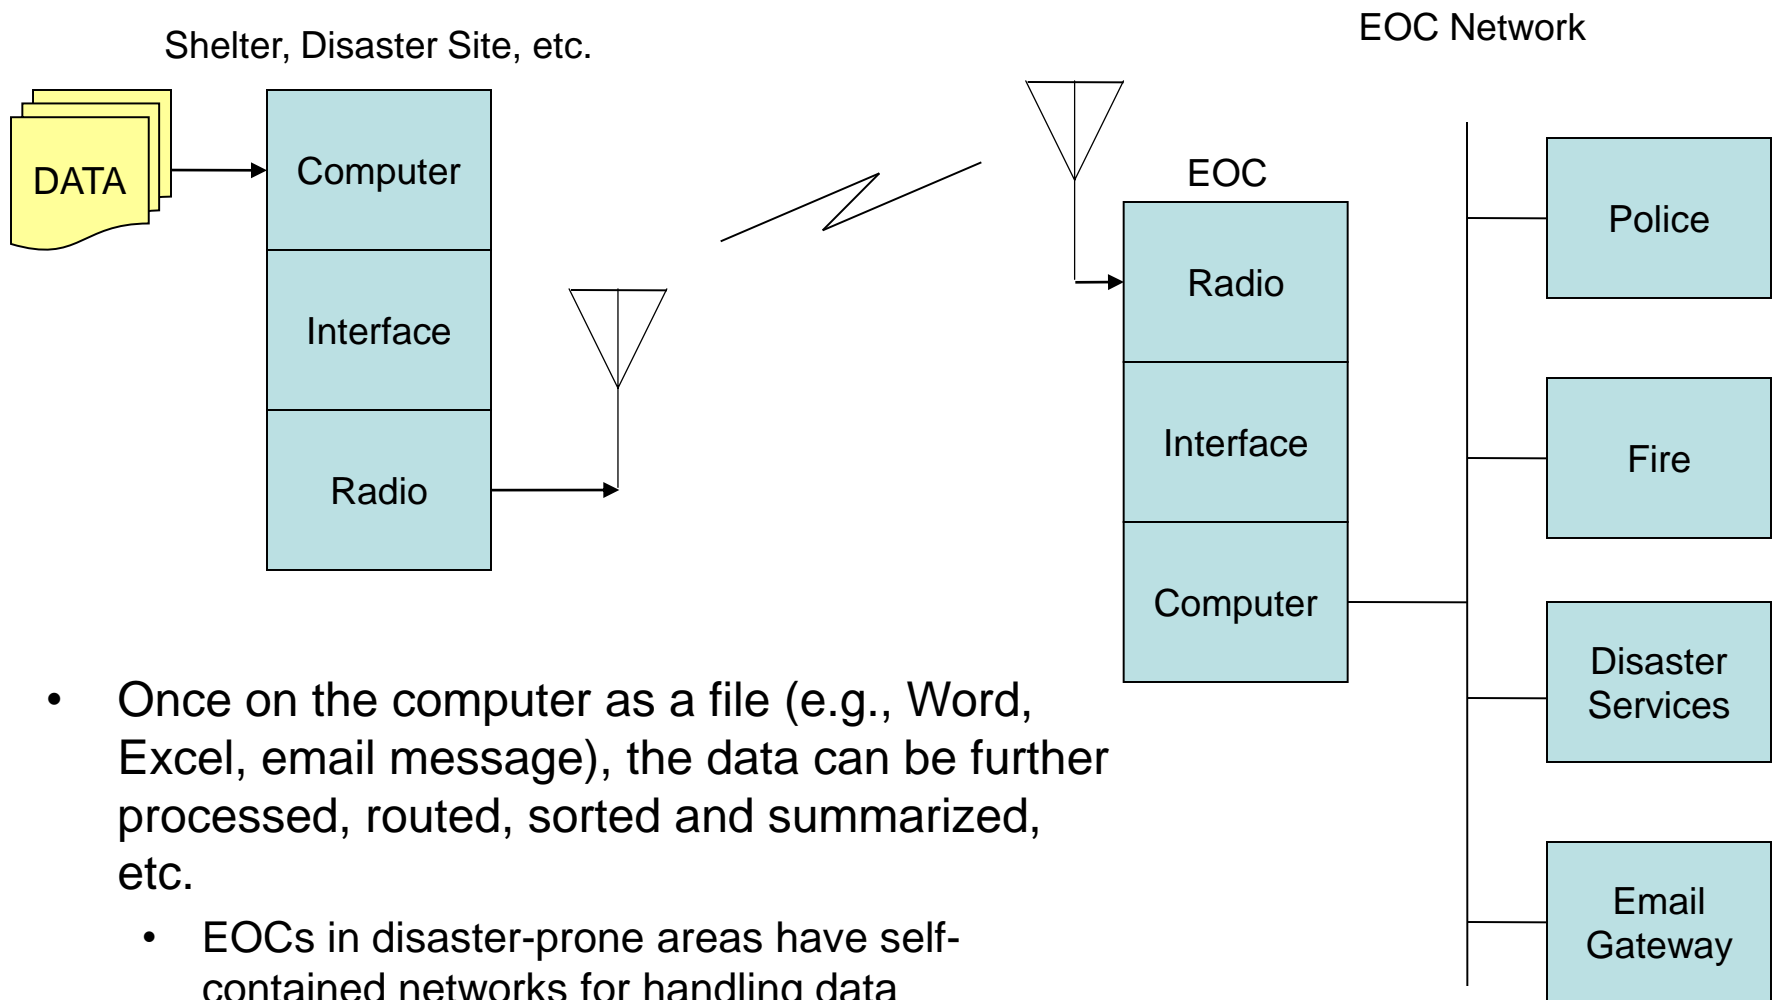


- Once on the computer as a file (e.g., Word, Excel, email message), the data can be further processed, routed, sorted and summarized, etc.
  - EOCs in disaster-prone areas have self-contained networks for handling data

## Packet Radio is a form of digital communications

- What is “digital communications”?
  - Sending information as digital “bits” (0s and 1s)
  - Can be:
    - Voice that has been digitized (e.g., Voice over IP)
    - Data (letters, numbers, punctuation)
    - Digital representations of amorphous objects like pictures (e.g., JPGs, MPEGs, WAVs)
- In ham radio, “digital communications” mostly refers to sending data
  - Not much digitized voice (D-Star still relatively limited)
- Digital is generally more efficient than voice or CW
  - Lower power (versus voice)
  - Reduced bandwidth needs (versus voice)
  - Error checking and correction (versus voice, CW)
  - Extensive skill not required (versus CW)




Digital is sent over radio by modulating AM, SSB or FM

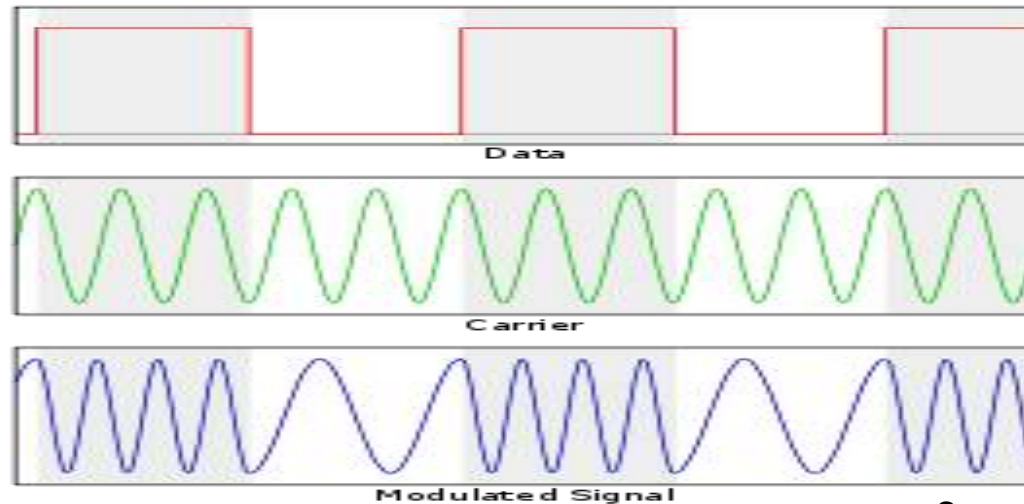

Source: Wikipedia Commons

**Frequency Shift Keying (FSK) simply uses two tones, one to represent 1's, one to represent 0's**

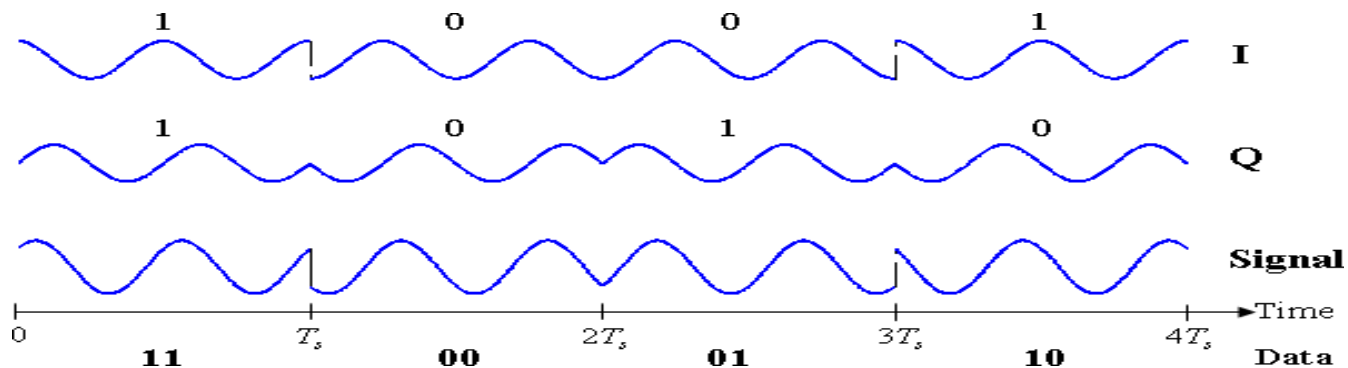

Source: Wikipedia Commons

**Phase Shift Keying (PSK) uses phase differences between two tones**


## WARNING: Most digital data communications is continuous duty cycle

- Duty cycle: percent of time the transmitter is outputting at set power
- In SSB voice, the transmitter is rarely outputting at full power because it is amplitude modulation
- CW is not continuous duty because of pauses between dots and dashes
- For most digital, and especially for packet, the transmitter is outputting continuously during a transmission
- Most ham equipment CANNOT handle continuous duty cycle at full power
  - e.g., a 100 watt multimode rig that will run 100 watts on CW/SSB, but is limited to 50 watts on AM/FM
- It's not just the transceiver – antennas, transmission lines, tuners, baluns, etc. may not be able to take continuous duty cycle at full power

**Even if you are within the rig's continuous duty cycle rating, can the antennas, etc. take it?**




To get the data to/from the radio, we need two things:

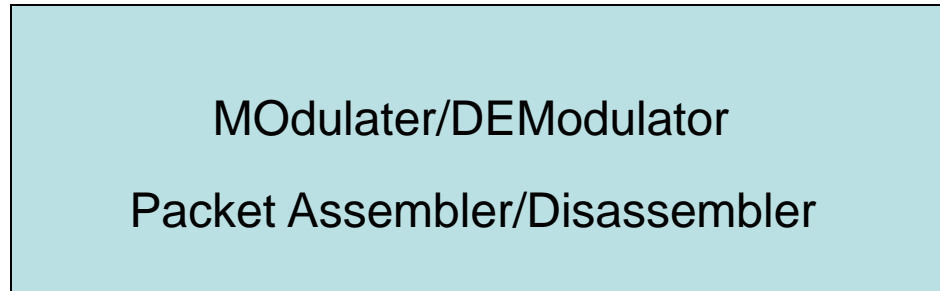


- MOdulater/DEModulator converts bits to sounds and converts sounds to bits
  - a/k/a MODEM
  - Used for years to let computers communicate over land lines
- Packet Assembler/Disassembler (PAD)
  - Create packets for outbound data
  - Decode packets on inbound data (include the error checking)
  - Communicate with the other station and arrange for re-transmissions when there are errors

Early interfaces were Terminal Node Controllers (TNCs), which provide a MODEM, PAD, and HOST services

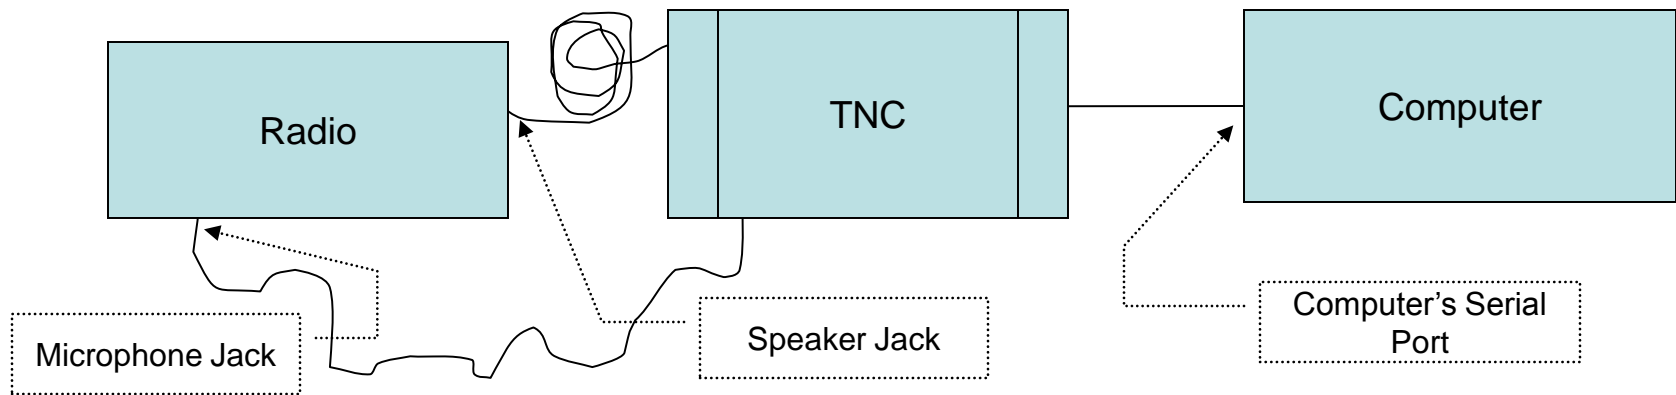


- Two modes of operation
  - KISS: Basic MODEM plus PAD
  - HOST: Advanced services such as Bulletin Board systems
- Needed TNCs in the “early days” when our computers could not handle both the text processing and the packet processing at the same time (not to mention the HOST services)
- Best known name: Kantronics
  - TNCs ranging from about \$200 to over \$500 (new)
  - More advanced models can control multiple rigs and multiple computers
  - Relatively bulky (until recently) and need their own power supplies

But more current computers have plenty of computer power and have sound cards

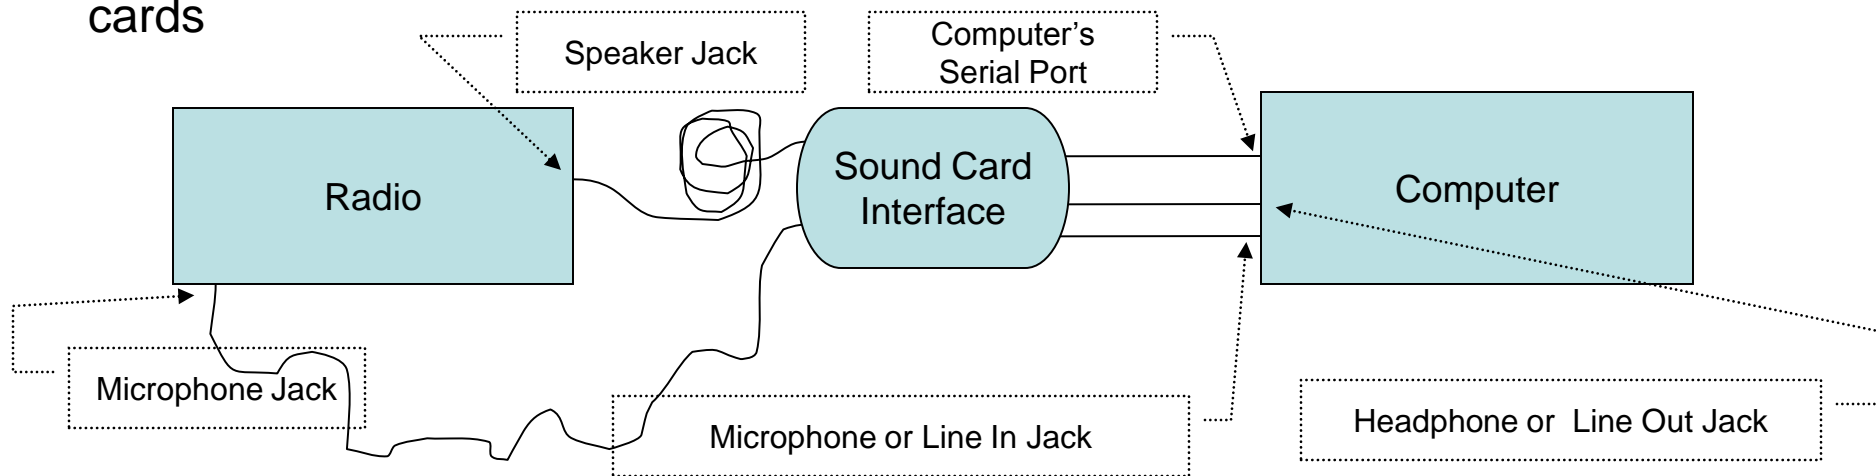


- Basic computer sound card does everything a modem does
- Plenty of software that can process packets; plenty of processing power
- Enter the RIGblaster
  - Need a good sound card in good working order and a reasonably fast computer
    - Circa 2002 or beyond
  - Does not provide HOST services
  - Prices range from \$60 to about \$200
    - Less than half the price of a full Kantronics TNC
  - Small and lightweight, no power supply needed if connected to computer via USB

Newer radios have data jacks for a single connection for sound in, sound out, and some rig control

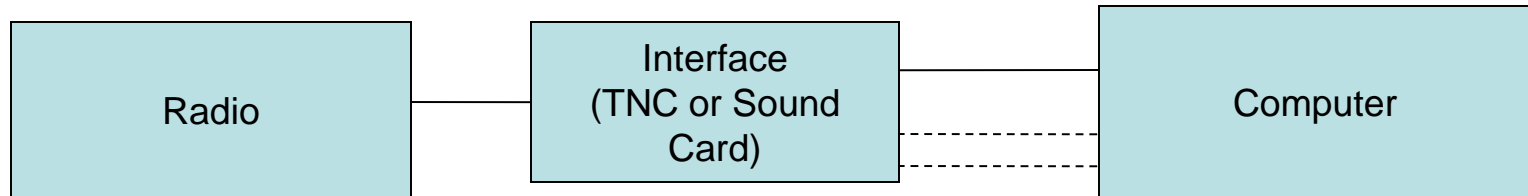

- Eliminates connectors to mic and headphone jacks
- Basic rig control functionality such as PTT and squelch
  - Does not include tuning, mode/band switching, etc.
- Example: Yaesu FT-897 6 pin mini-DIN



#### Pin Description

- 1 Data IN
- 2 GND
- 3 PTT
- 4 Data Out (9600 bps)
- 5 Data Out (1200 bps)
- 6 Squelch

Some of the newest TNCs are light, small, inexpensive, and much easier to use

- Generally under \$100, e.g.
  - TNCs: Coastal Chipworks TNC-X, Byonics TinyTrak4
  - Sound card interfaces: RIGblaster (NOMIC and Plug&Play), Buxcomm Rascal
  - External sound card: Tigertronics SignaLink USB
- No HOST mode
- With USB interface, powered by computer
- Provide packet processing for equipment that doesn't have packet processing capabilities such as GPS receivers
- Suitable for very portable operations (e.g., field APRS transmitter, digipeater)

Byonics MicroTrak AIO (GPS field tracker)  
uses a MicroTrak4 connected to a 2m HT




## So what do I buy?

- Older TNC, Sound Card Interface, or Newer TNC?
- Some of the issues:
  - Widest range of software works with TNCs (older or newer)
    - Some of the software works with sound card interfaces but not all
  - Newer TNCs better suited for use with APRS transmitters and with digipeaters
  - Newer TNCs not as complex as older, easier to implement, and lower cost
    - Do you need all the capabilities of a big mother Kantronics? Probably not.
  - Most field testing says sound card interfaces no more difficult to implement than older TNCs and probably easier
  - \$s
  - No known compatibility issues re: signals sent through older TNC being read by newer TNC/soundcard or vice versa
- **Does the software you want to run work with soundcard?**
- **Do you need the complexity and pain of the older TNCs?**

## One approach to implementing packet is Bulletin Board Systems (BBSs)

- BBS provides
  - Public postings (think of a bulletin board in the supermarket)
  - Private postings from one individual to another (not exactly email, but is user-to-user focused)

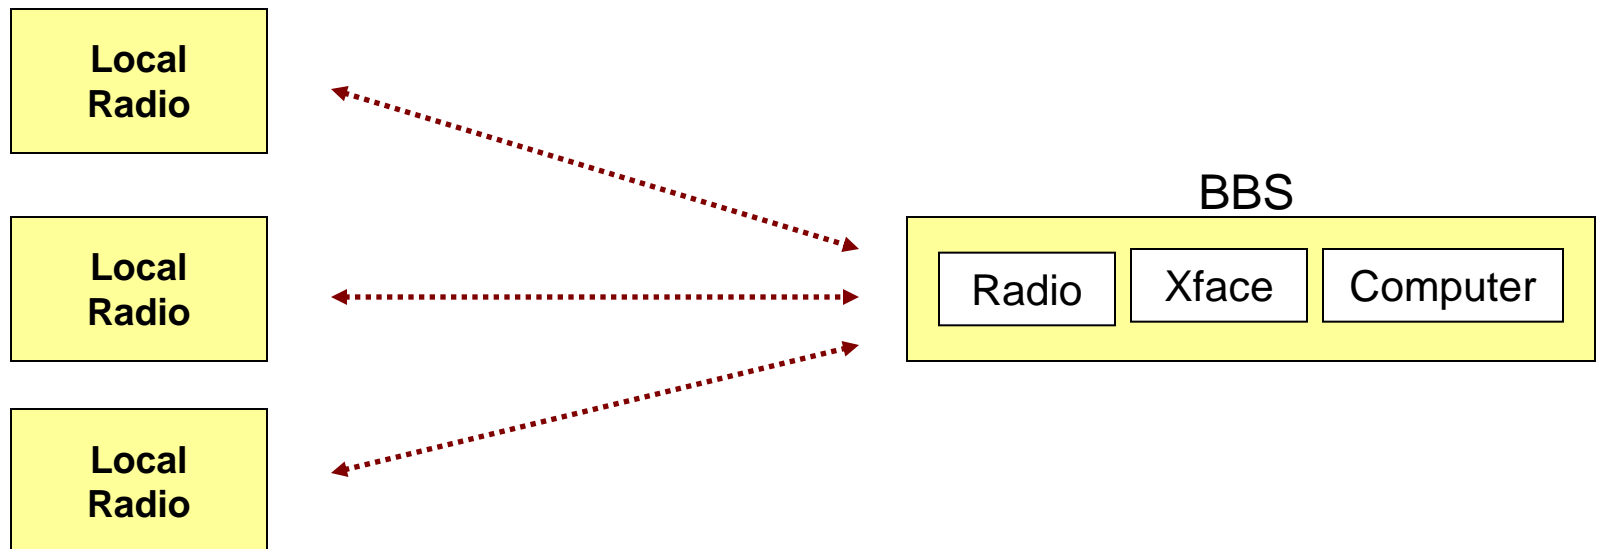

- Stations within the disaster area can pass messages to each other via the BBS
  - BBS can be inside the disaster area (emergency power) or outside the disaster area

BBS networks have grown up in some areas to provide extensive coverage inside and outside a disaster area



- Northeast FlexNet map
  - Radio-to-radio
  - Some stations still in operations, although map is not current
- Stations communicate with each other via packet

**Fewer and fewer BBS stations on the air**




## Sample transmission times using packet to a BBS

- Stamford to Rowayton (10 miles), using an older Dell laptop (Latitude D600) and a Yaesu FT-7800 at 25 watts FM
- Notes:
  - 3600 seconds in an hour
  - Includes time to connect/handshake and time to disconnect
  - Random generated message contents


Chars	Seconds	Equiv Minutes	Characters/ Second	Equiv lines of text (100 chars/line)	Equiv H&W emails (200 chars)
10	52	<1 min	<1	n/a	n/a
100	49	<1 min	2	1	n/a
1,000	73	1:13	13	10	5
10,000	403	6:43	25	100	50

No substantial difference in transmission time for real-world text

Older BBSs were based in the TNC; newer ones are based in the computer

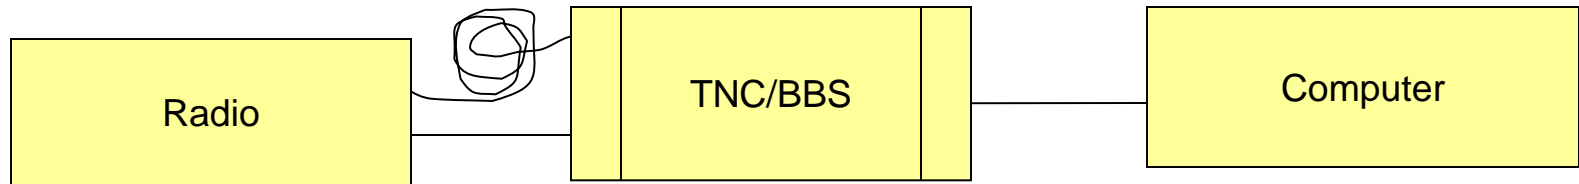


- BBS in the TNC made it difficult to get data from the BBS into the computer
  - The best that could be done was to display the contents of the BBS on the computer monitor and maybe screen capture it.

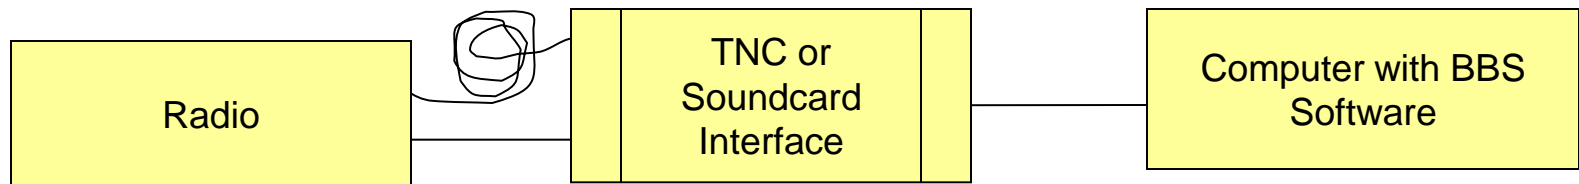

- BBS in the computer makes it possible to access the messages as data
  - Once accessed as data, can be forwarded or processed
  - BUT
    - Most BBS systems allow only text (i.e., printable characters) in their messages
    - They do not allow non-text attachments such as spreadsheets or images


## What software/hardware for the local station accessing a BBS?

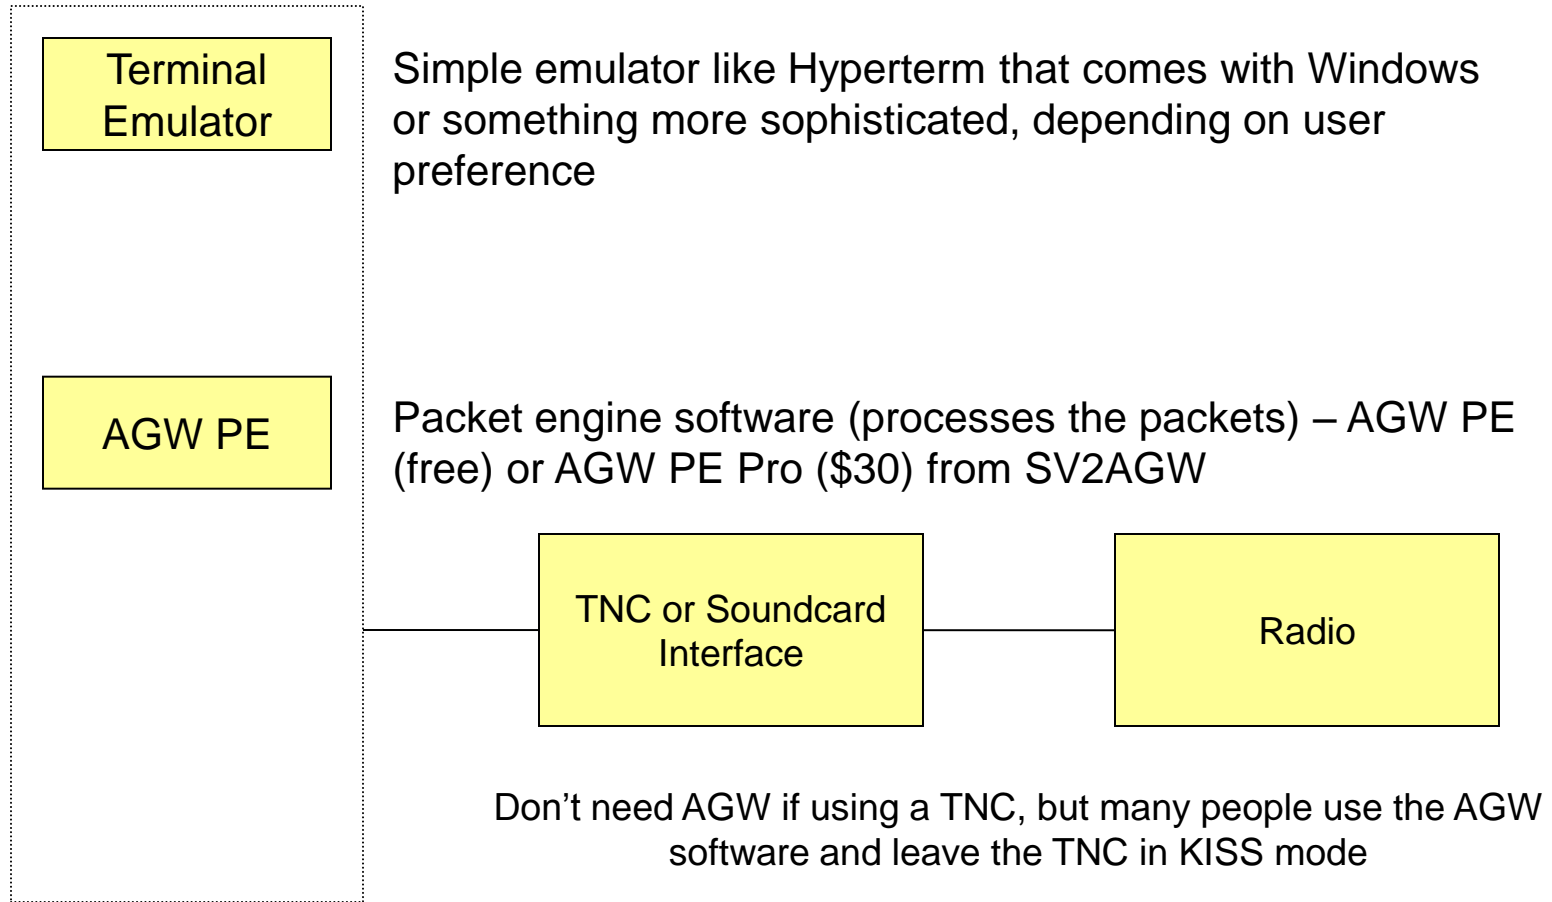

Most BBSs have low limits for messages sizes


## Some EMCOMM groups are focusing on VHF packet with Winlink

- Winlink is a worldwide emergency email system connected to the Internet
  - Five servers around the world
  - Radio access (RMS) from local stations
  - Once a message makes it to a Winlink server, it enters the Internet as a standard email message
  - RMS station is VHF packet radio interfacing to a computer running RMS software
  - <http://www.winlink.org>

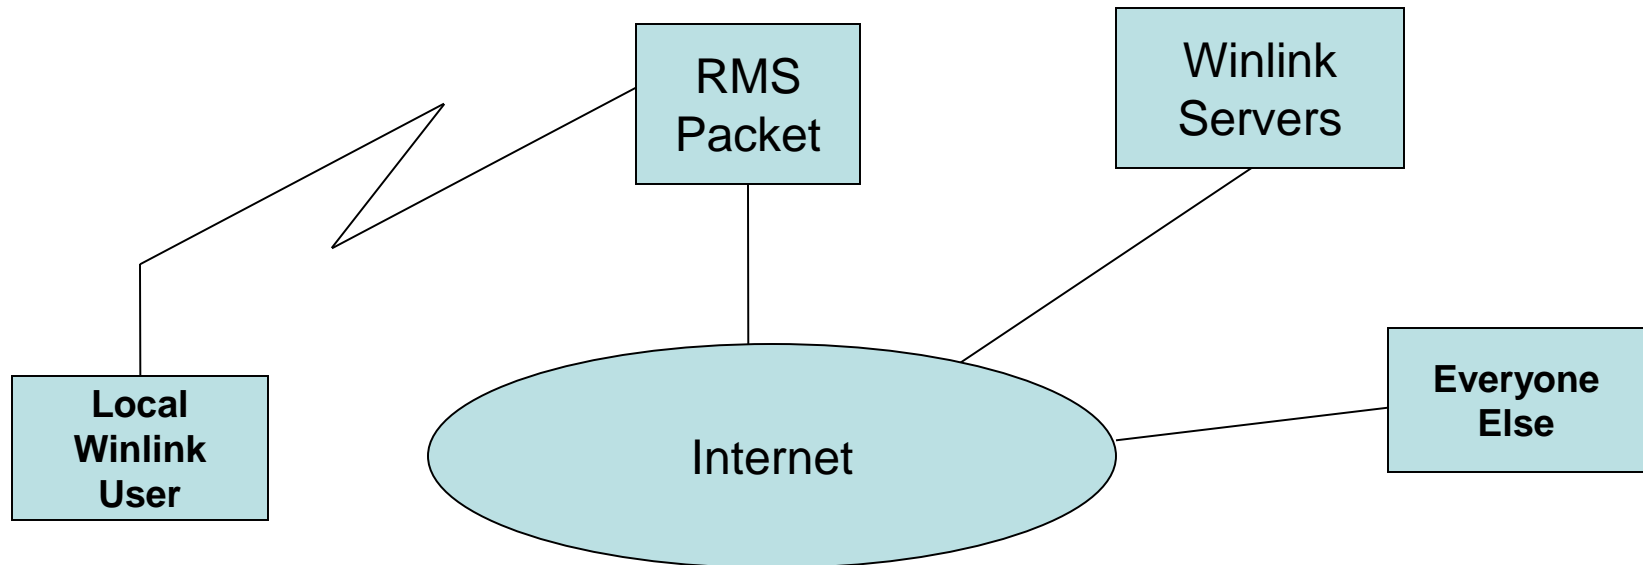


Basic concept is packet radio within the disaster area to an RMS packet station outside the disaster area

- Local stations can communicate via RMS Packet station(s) outside the disaster area

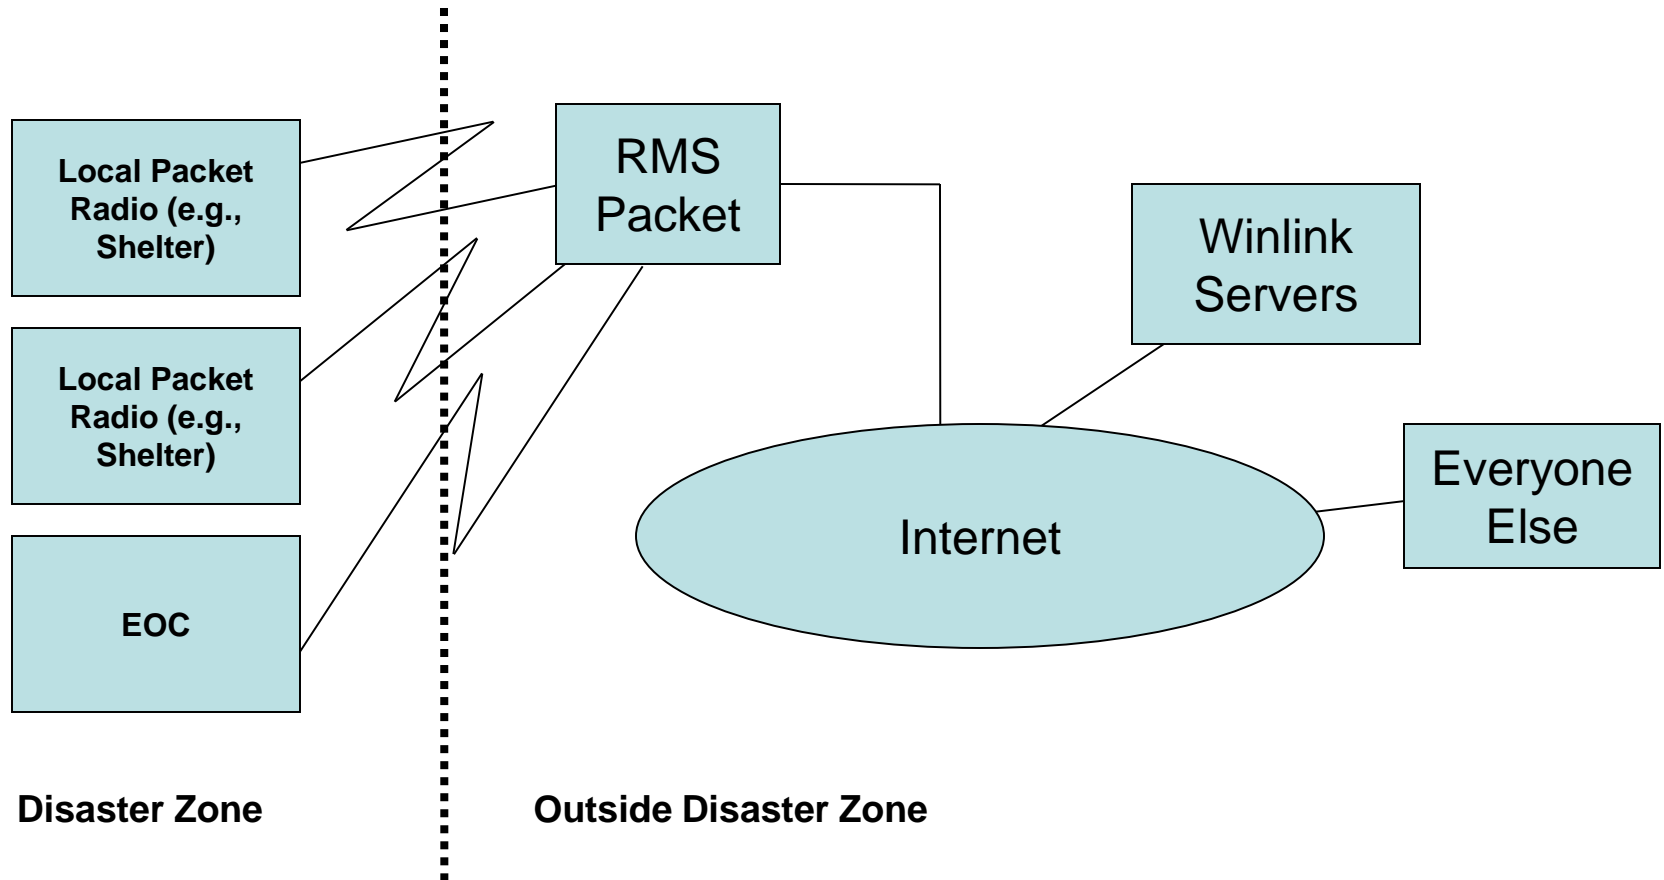

**Note the individual stations do not talk with each other in this model**

Stations within the disaster area can communicate with each other using Winlink Point-to-Point (P2P)

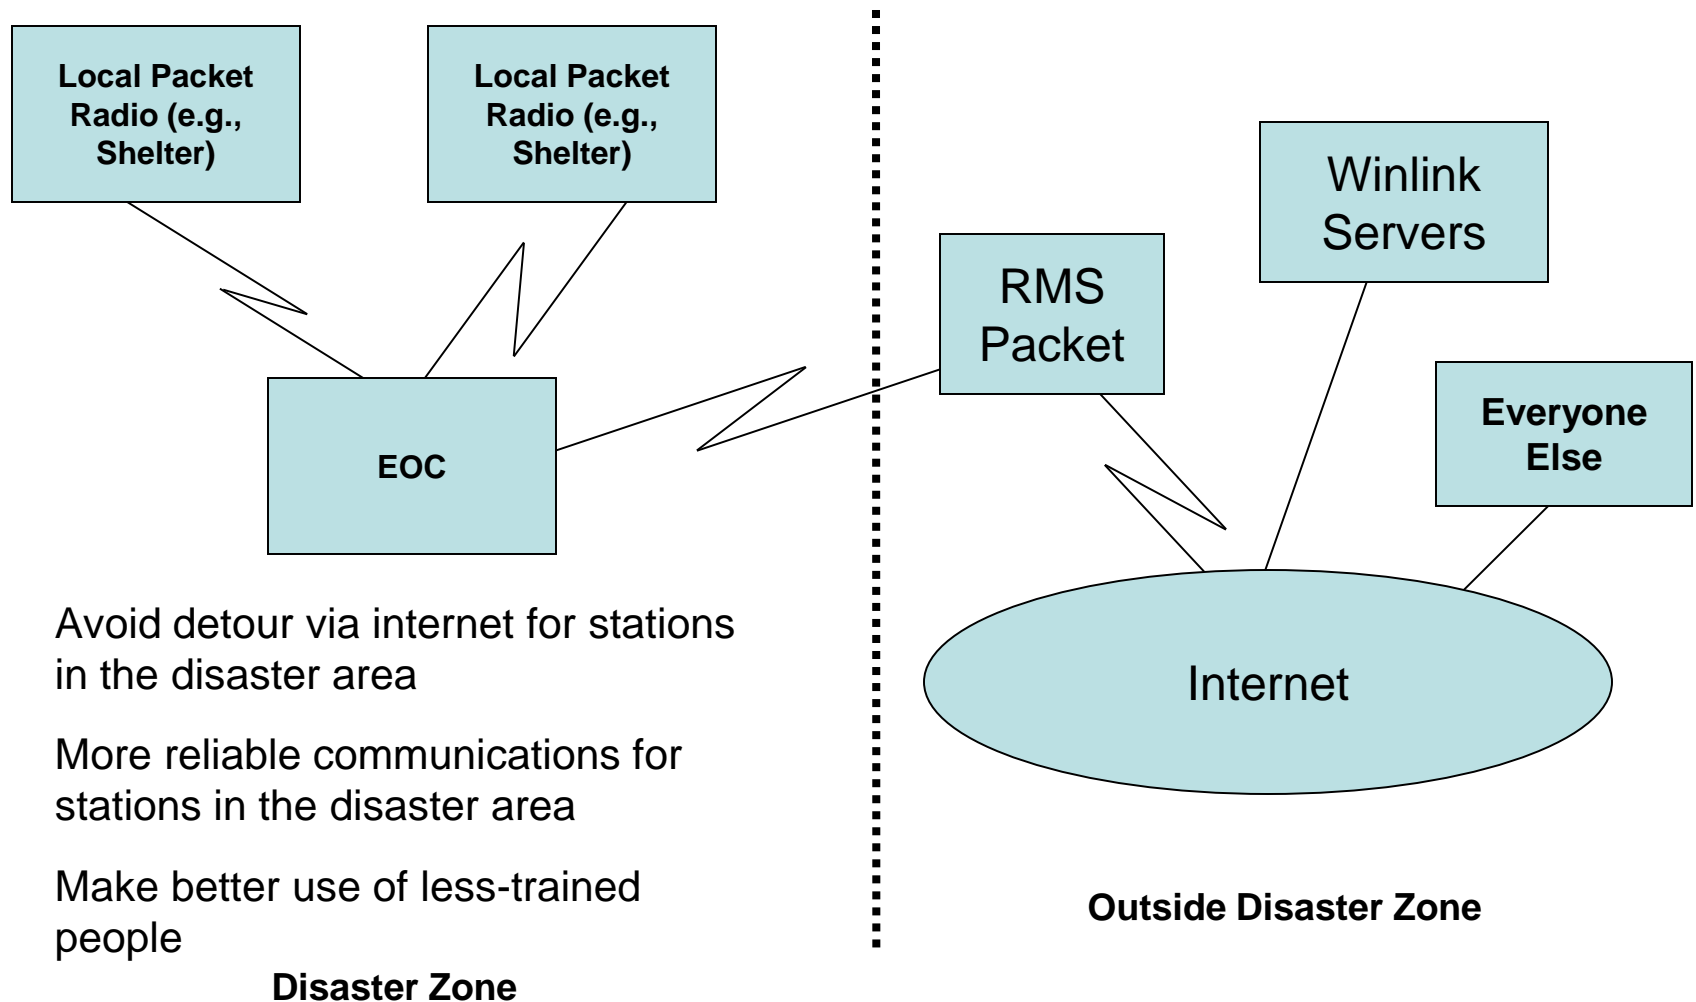


- Avoid detour via internet for stations in the disaster area
- More reliable communications for stations in the disaster area
- Make better use of less-trained people


**Disaster Zone**

**Outside Disaster Zone**

Messages can be sent to/from the disaster area using HF Pactor or Winmor

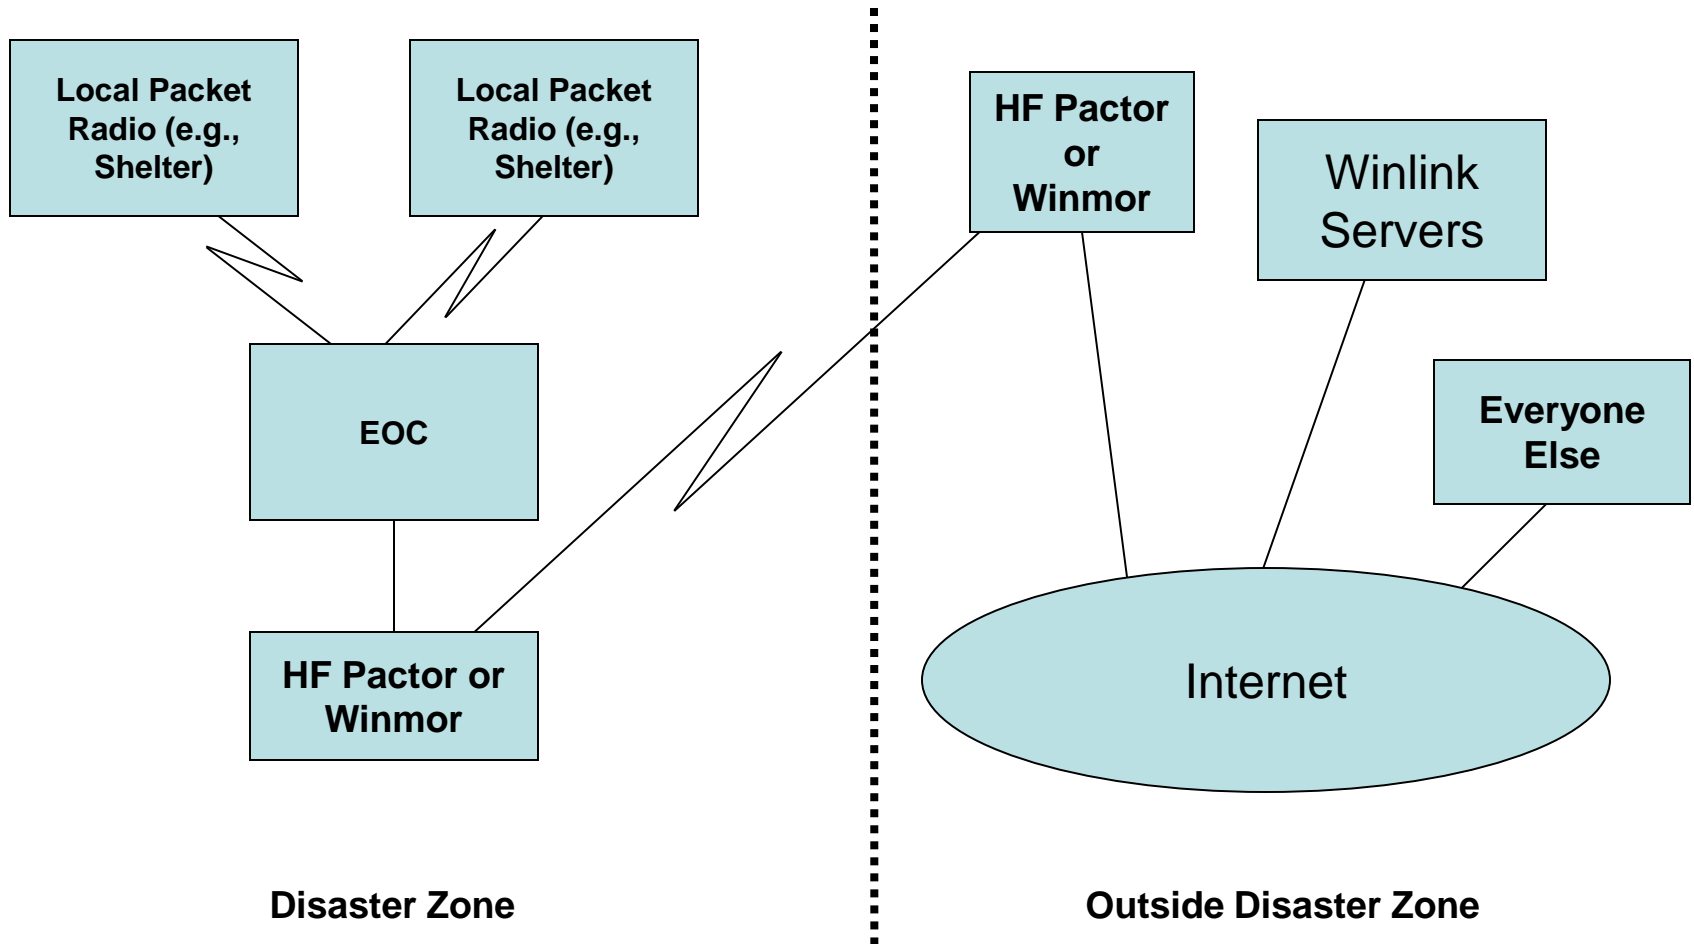

## Some Emcomm organizations are setting up Winlink networks

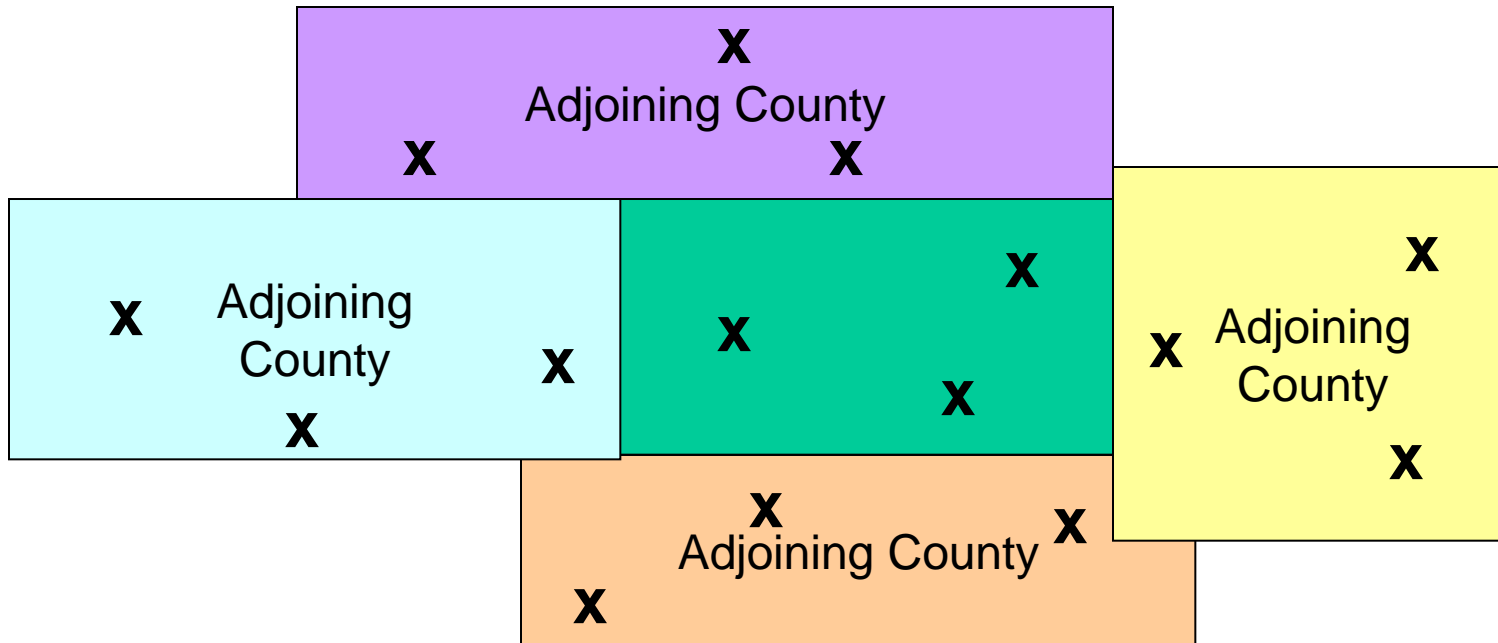

- Winlink nodes are coordinated within the county to maximize reach and coordinated with adjoining counties to get further coverage
  - Coordination includes locations, electric, and internet grids
- Winlink nodes in EOCs, or at least secure, safe buildings with good emergency power



## Sample transmission times for Winlink messages


- Stamford to Rowayton (10 miles), using an older Dell laptop (Latitude D600) and a Yaesu FT-7800 at 25 watts FM at 1200 baud
- Notes:
  - Includes time to connect/handshake and time to disconnect

Chars	Characters/ Second RANDOM	Characters/ Second SOME REPEAT	Characters/ Second MASSIVE RPT
100	2	10	100
1,000	12	20	150
10,000	26	45	320
100,000	29	50	1500
	All random chars	Representative real-world text	Same 10 chars repeated

**1500 char/sec at 1200 baud. Say what?????!!!**

Winlink-specific programs (e.g., Paclink) compress the message before sending

## Preferred connection uses a TNC with RMS Express

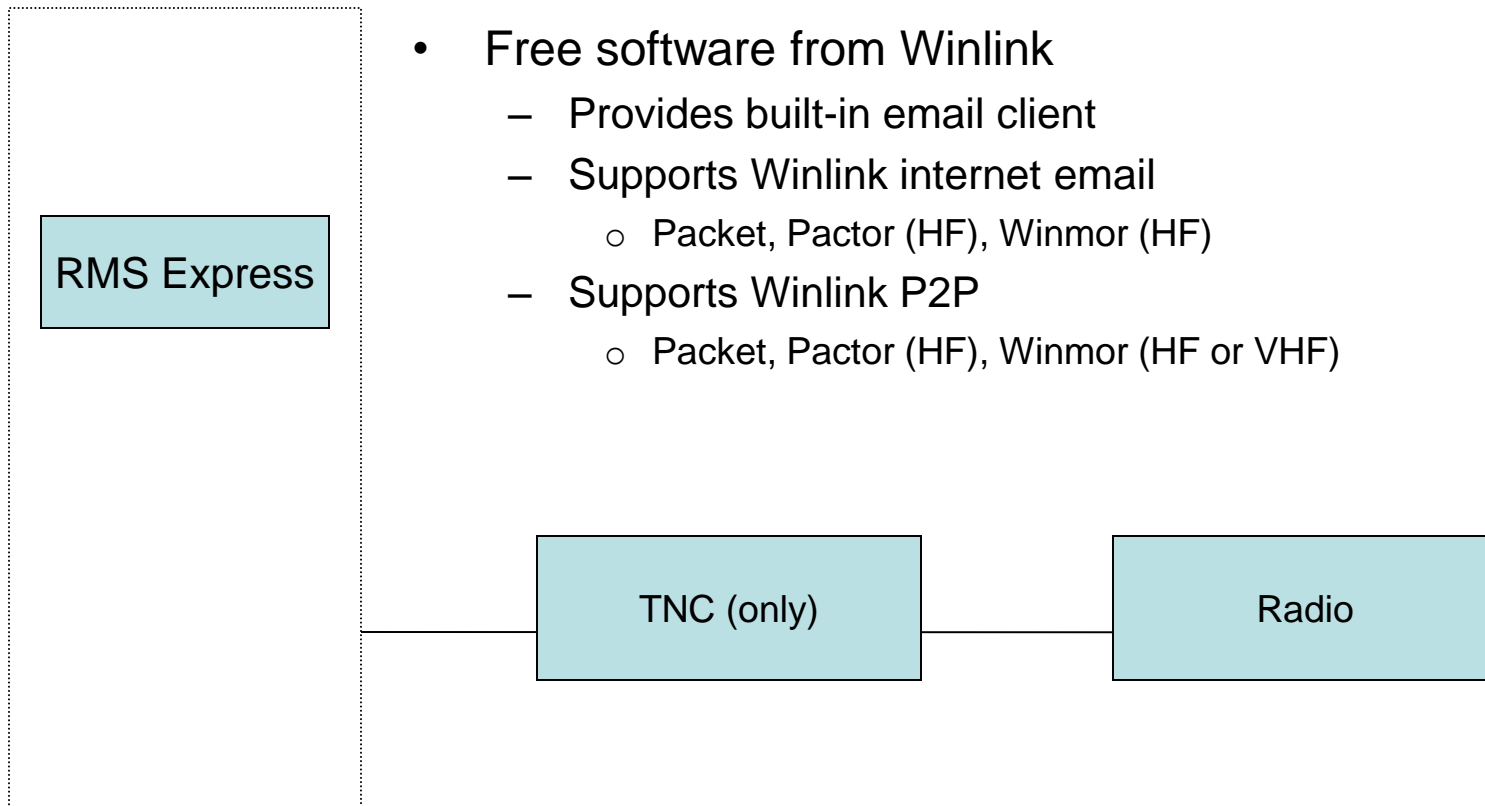


- Free software from Winlink
  - Provides built-in email client
  - Supports Winlink internet email
    - Packet, Pactor (HF), Winmor (HF)
  - Supports Winlink P2P
    - Packet, Pactor (HF), Winmor (HF or VHF)

Except for Winmor, requires that each station has a TNC – not always practical given general lack of packet use among hams

**Limit of 120,000 characters per message, including attachments**

## Paclink can operate with soundcard interface, but does not support P2P

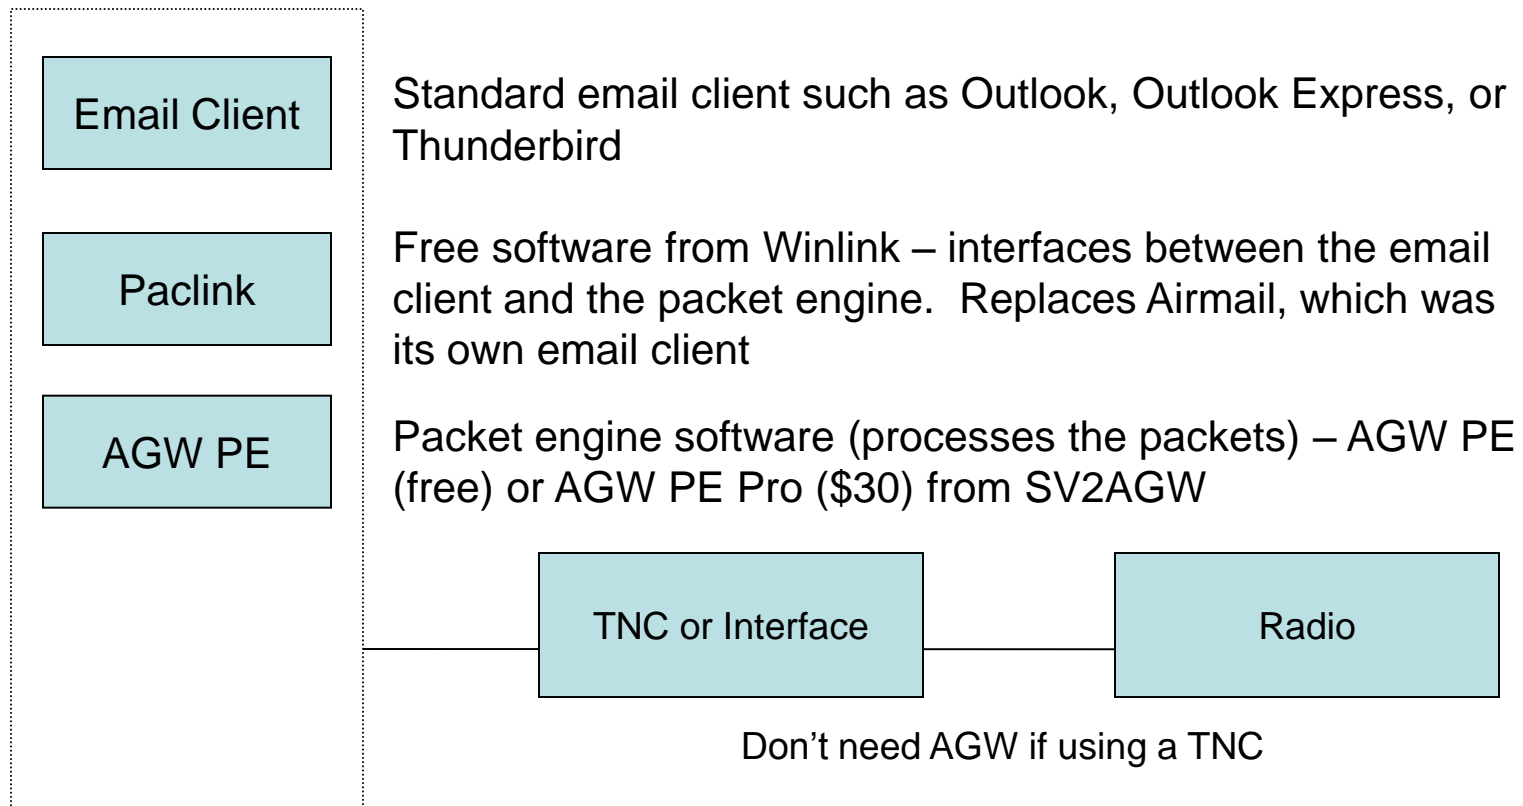

**Limit of 120,000 characters per message, including attachments**

## What computers/operating systems for Winlink?

- In general Paclink, AGWPE, RMS Express run on Windows XP/Vista/7 computers
  - Under Vista/7 must be loaded outside of c:\Program Files
  - Generally run okay in Win XP virtual partitions (e.g., VMware)
  - Generally run well on Macs in Windows emulation
  - Generally run well on Linux with WINE
- Download Paclink, RMS Express from Winlink, download AGW from SV2AGW site
  - Often provided on CD with TNC, sound card interface, other interface products
- If using Paclink
  - Configure a host called “LOCALHOST” to talk with your email client
- If using AGW
  - Configure AGW as to port, baud, etc.
  - Start AGW before Paclink
- If using RMS Express
  - Configure email client to talk with your email provider (if desired)

# You can see a map of local Winlink stations

## Live RMS Packet Station Positions

Positions of RMS Packet gateway stations are calculated by the WIL2K servers and plotted randomly within the 6-character grid square configured in the RMS station's packet channel. The RMS maps are intended as tools to find on-air stations, not as an exact, actual location of gateway stations.



<http://www.winlink.org/RMSPacketPositions>

## Repeaters, digipeaters, and Packet Radio

- Typical VHF Packet Radio does not work well with regular VHF ham repeaters
  - Typical repeater's delay between unkeying and carrier drop will often cause time-outs
  - Courtesy tones do ugly things to packets
- Digipeaters (DIGItal rePEATERS) are repeaters specifically designed for extending digital communications (and especially Packet Radio communications).
  - Generally small, lightweight (size of a typical VHF mobile radio *or smaller*)
  - Some digipeaters can run for days on one set of batteries (low power, primarily for getting around obstacles)
  - Can be quickly deployed with a portable antenna



Byonics MicroTrak 4  
configured as a digipeater

## Other protocols may also be of interest

- NBEMS (Narrow Band Emergency Messaging System) – a newer method focused on HF for direct communications from disaster areas to EOCs (inside or outside of the disaster area)
  - Can also be used for VHF
- HF Pactor – Packet Radio over HF for longer-range communications, including Emcomm from within a disaster area to outside the disaster area
  - High-end TNCs (\$\$\$s)
  - Does not work with sound cards interfaces
- WINMOR – HF protocol for use with Winlink
  - Targeted for “typical” Windows computer with sound card
  - Targeted at 300-1200 baud
- PSKMail – mail via PSK31 (or other PSK modes)
  - Works well with relatively short HF messages
  - No error checking or correction

## Useful Web Sites

- Winlink: [//http://www.winlink.org](http://www.winlink.org)
- SV2AGW (AGW Packet Engine): [//http://www.sv2agw.com/ham](http://www.sv2agw.com/ham)
- Yahoo Loading WL2K group:  
[groups.yahoo.com/group/LOADING\\_WL2K\\_USER\\_PROGRAMS/](http://groups.yahoo.com/group/LOADING_WL2K_USER_PROGRAMS/)
- Yahoo Winlink EMCOMM group:  
[//http://groups.yahoo.com/group/wl2kemcomm/](http://groups.yahoo.com/group/wl2kemcomm/)
- Yahoo Paclink group: [//groups.yahoo.com/group/PaclinkMP/](http://groups.yahoo.com/group/PaclinkMP/)
- Narrow Band Emergency Messaging System: [//w1hkj.com/NBEMS/](http://w1hkj.com/NBEMS/)
- Good overview of digital modes: [//www.wb8nut.com/digital.html](http://www.wb8nut.com/digital.html)
- Yahoo DigitalRadio group: [//groups.yahoo.com/group/digitalradio/](http://groups.yahoo.com/group/digitalradio/)